

AIR HANDLER TERMINAL UNIT CONTROLLER

OVERVIEW

The HVAC controls market requires an economical DDC controller that provides optimum zone control for packaged air handling terminal unit applications.

The Circon SCC-300-AHC comes complete with easy to configure air handler terminal unit control software combined with a cost-effective hardware platform to provide exceptional flexibility. Configurable for a variety of applications, the SCC-300-AHC is all you need in a 13-point air handler unit DDC controller.

APPLICATIONS

The SCC-300-AHC can be used in most two-pipe or four-pipe packaged air handler terminal unit applications. It maintains a constant zone temperature or supply air temperature by configurable, energy-efficient, sequenced control of the supply fan, one or two heating sources, one cooling source and an optional outdoor air damper and exhaust air damper or fan.


An internal time-of-day schedule allows the SCC-300-AHC to optimize energy usage by adapting its control sequence to occupied, unoccupied or standby setpoints. Using demand limiting, a supervisory controller can instruct the SCC-300-AHC to decrease the air handler's energy usage with minimal impact on comfort.

A versatile general-purpose side loop provides three styles of independent control for wide range of equipment including unit heater, baseboard heater, exhaust fan, lighting, maintaining space static or duct pressure, and more. The side loop together with otherwise unused I/O saves the cost of additional controllers for simple applications.

The SCC-300-AHC's inputs, outputs, control sequences, demand limiting and alarming, trending, and scheduling functions are all easily configured using simple Windows® -based software which is all fully compatible with Echelon® Corporation's LNS®.

ORDERING INFORMATION

Part number 10-0394

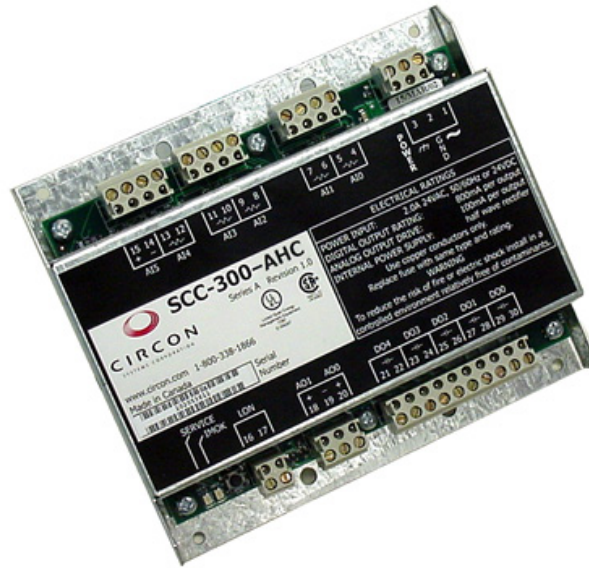

FEATURES AND BENEFITS

- Seamless integration into interoperable LonWorks® networks; adaptable for standalone installation
- Easily mounts directly inside air handler enclosure
- Five digital outputs (TRIAC) and two analog outputs simplify connecting to a variety of digital, floating and analog-controlled actuators for standard air handler terminal units
- Five resistive inputs for space temperature (required) with / without bypass button and any four of: supply air temperature, mixed air temperature, setpoint adjust, fan, filter, window and occupancy sensors
- An analog input enables CO₂ - based demand control ventilation or dehumidification control
- A side loop provides independent control for additional simple HVAC equipment
- Onboard soft clock, scheduling, and trending to decrease costs and increase flexibility
- Transmits alarms for local or remote annunciation
- Faster, easier to use LNS plug-ins
- LonMark® Space Comfort Controller functional profile 8508



SPECIFICATIONS

I/O CAPABILITY

6 Inputs	Five 10 kΩ thermistor, Precon curve: Type II model 24 or Type III model 3, or dry contact One voltage 0-10 VDC
2 Analog outputs	0-10 VDC. Max drive 100 mA per output
5 Digital outputs	Isolated TRIAC 800 mA maximum. 30 mA minimum, at 24 VAC. Short circuit protected, auto reset

COMMUNICATIONS

Transceiver	Echelon Free Topology Transceiver (FTT 10A) @ 78 kbps
Wire type	AWG22 to AWG16 stranded (use only twisted pair wiring and copper conductors for network)
Neuron®	3150, 10 MHz

POWER SUPPLY

Controller	2.0 A, 24 VAC 50-60 Hz or 24 VDC
Fuse	2.0 A slow blow (Bussman GMD 2.0A, Littlefuse 23902.0A)
Rectifier	Half wave

MECHANICAL

Operating temperature	32°F to 122°F (0°C to 50°C)
Relative humidity	5% to 95% RH (non condensing)
Weight	15 oz. (420 grams)
Dimensions	0.8" x 5" x 5.8" (20.3 mm x 127 mm x 147 mm)
Enclosure material	Metal
Mounting	Four sheet metal screws, optional DIN rail adaptor

AGENCY LISTINGS AND REGULATORY COMPLIANCE

Class II device (when powered by class II supply)
 CSA 22.2 #205-M1983, #950-M89
 UL 916 certification for Energy Management Equipment
 FCC Part 15, Class B of the FCC rules for Radio Frequency Devices
 EMC Directive 89/336/EEC
 LonMark 3.3 certified, LonMark functional profile: 8508

CIRCON SYSTEMS CORPORATION

110 - 6660 McMillan Way, Richmond, BC, Canada V6W 1J7
 telephone 604.232.4700 technical support 1.877.350.2299 facsimile 604.232.4747
 toll free 1.800.338.1866 website www.circon.com



AIR HANDLER TERMINAL UNIT CONTROLLER

OVERVIEW

The HVAC controls market requires an economical DDC controller that provides optimum zone control for packaged air handling terminal unit applications.

The Circon SCC-310-AHC comes complete with easy-to-configure air handler terminal unit control software combined with a cost-effective hardware platform to provide exceptional flexibility. Configurable for a variety of applications, the SCC-310-AHC is all you need in a 13-point air handler unit DDC controller with onboard relays.

APPLICATIONS

The SCC-310-AHC can be used in most two-pipe or four-pipe packaged air handler terminal unit applications. It maintains a constant zone temperature or supply air temperature by configurable, energy-efficient, sequenced control of the supply fan, one or two heating sources, one cooling source and an optional outdoor air damper and exhaust air damper or fan.

An internal time-of-day schedule allows the SCC-310-AHC to optimize energy usage by adapting its control sequence to occupied, unoccupied or standby setpoints. Using demand limiting, a supervisory controller can instruct the SCC-310-AHC to decrease the air handler's energy usage with minimal impact on comfort.

A versatile general-purpose side loop provides three styles of independent control for wide range of equipment including unit heater, baseboard heater, exhaust fan, lighting, maintaining space static or duct pressure, and more. The side loop together with otherwise unused I/O saves the cost of additional controllers for simple applications.

The SCC-310-AHC's inputs, outputs, control sequences, demand limiting and alarming, trending, and scheduling functions are all easily configured using simple Windows®-based software which is all fully compatible with Echelon® Corporation's LNS®.

ORDERING INFORMATION

Part number 10-0435



FEATURES AND BENEFITS

- Seamless integration into interoperable LonWorks® networks; adaptable for standalone installation
- Easily mounts directly inside air handler enclosure
- Five relay outputs and two analog outputs simplify connecting to a variety of digital, floating and analog-controlled actuators for standard air handler terminal units
- Five resistive inputs for space temperature (required) with/without bypass button and any four of: supply air temperature, mixed air temperature, setpoint adjust, fan, filter, window and occupancy sensors
- An analog input enables CO₂-based demand control ventilation or dehumidification control
- A side loop provides independent control for additional simple HVAC equipment
- Onboard soft clock, scheduling, and trending to decrease costs and increase flexibility
- Transmits alarms for local or remote annunciation
- Faster, easier to use LNS plug-ins
- LonMark® Space Comfort Controller functional profile 8508



SPECIFICATIONS

I/O CAPABILITY

6 Inputs	Five 10 kΩ thermistor, Precon curve: Type II model 24 or Type III model 3, or dry contact One voltage 0 10 VDC
2 Analog outputs	0 10 VDC. Max drive 100 mA per output
5 Digital outputs	Dry contact relay: 2.0 A maximum at 24 VAC or 24 VDC

COMMUNICATIONS

Transceiver	Echelon Free Topology Transceiver (FTT 10A) @ 78 kbps
Wire type	AWG22 to AWG16 stranded (use only twisted pair wiring and copper conductors for network)
Neuron®	3150, 10 MHz

POWER SUPPLY

Controller	2.0 A, 24 VAC 50 60 Hz or 24 VDC
Fuse	2.0 A slow blow (Bussman GMD 2.0A, Littlefuse 23902.0A)
Rectifier	Half wave

MECHANICAL

Operating temperature	32°F to 122°F (0°C to 50°C)
Relative humidity	5% to 95% RH (non condensing)
Weight	15 oz. (420 grams)
Dimensions	0.8" x 5" x 5.8" (20.3 mm x 127 mm x 147 mm)
Enclosure material	Metal
Mounting	Four sheet metal screws, optional DIN rail adaptor

AGENCY LISTINGS AND REGULATORY COMPLIANCE

Class II device (when powered by class II supply)
 CSA 22.2 #205-M1983, #950-M89
 UL 916 certification for Energy Management Equipment
 FCC Part 15, Class B of the FCC rules for Radio Frequency Devices
 EMC Directive 89/336/EEC
 LonMark 3.3 certified, LonMark functional profile: 8508

CIRCON SYSTEMS CORPORATION

110 - 6660 McMillan Way, Richmond, BC, Canada V6W 1J7
 telephone 604.232.4700 technical support 1.877.350.2299 facsimile 604.232.4747
 toll free 1.800.338.1866 website www.circon.com

